

40-500W Ku-BAND GaN BUC & SSPA RACK-MOUNT

DATASHEET



The new generation of ALGA high powered Rack-Mount Ku-Band SSPA GaN (BUC option available)

Choose one of our high power rack-mount SSPA's for Ku-Band and you'll receive a value priced solution, when you need it, where you need it, with everything you need.

The Alga series of high power SSPA's are designed for use primarily in satellite communications applications. The operating frequency band of 14.0 - 14.5 GHz or 13.75 -14.5 GHz in the Ku-Band. Other frequency ranges are also available to customer specification. These units are characterized by high linearity and high power efficiency, as well as excellent thermal efficiency and dependability over the full operating temperature range.

KEY FEATURES

- Operating temperature range of 0°C to +50°C
- Redundancy ready
- Light weight and compact – highest power density on the market
- High thermal dissipation efficiency resulting in “Best in Class” Mean Time Before Failure
- Over temperature shutdown
- High Mean Time Before Failure (MTBF over 100 K hours)
- Monitor & Control Interface
- Serial and Analog M&C
- Internet web page interface
- Alarms: Voltage/Current/Temperature/Summary
- Control: Mute/Gain
- RF power detection

MECHANICAL FEATURES

- Light weight
- Smallest size

OPTIONS

- Frequency range options available
- 1:1 and 1:2 Redundancy Systems
- Extended Warranty
- BUC: BUILT IN with or without internal 10 MHz ref

COST EFFECTIVE SOLUTIONS FOR THE FUTURE

SALES@ALGA.CA | WWW.ALGA.CA | 1-514-694-8666



RACK-MOUNT SSPA SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

Frequency Range	14.0 – 14.5 GHz ; 13.75 – 14.5 GHz (Extended) ; (other options available)
Gain	70 dB nominal
Max Input Power w/o Damage	0 dBm
Gain flatness Over Full Band	± 1.0 dB max
Gain Slope	± 0.4 dB max / 40 MHz max.
Gain Variation	± 1.0 dB over max over operating temperature range
Gain Adjustment Range	20 dB in 0.5 dB steps
In/Output Return Loss (VSWR)	14 dB min. (1.5:1 max)
Noise figure at maximum gain	10 dB nominal
Spurious at PLinear	-55dBc max @PLinear
Harmonics at PLinear	-50 dBc max @PLinear
VSWR	Input (1:50:1) Output (1:30:1)
AM/PM conversion	2.0 degrees/dB max (@PSAT)
Group Delay (per 40 MHz)	Linear 0.01 ns/MHz ; Parabolic 0.003 ns/MHz ² ; Ripple 1.0 ns p-p
Third order IMD (2 equal tones 5MHz apart)	-25 dBc max. @PSAT – 3dB
Prime Power Voltage	90 – 265 VAC (high power models 190 – 265)
Prime Power Frequency	47 – 63 Hz

INTERFACE


Power	AC
M&C – Analogue RS-485	RJ-45 and (DB 9 or DB 15)
Redundancy	RJ-45 and DB 15
Output Interface	WR75 Grooved
Input Interface	N-Type Female, 50 Ohms

SPECIFICATION BY SSPA POWER

SSPA POWER PSAT (TYPICAL) WATTS PSAT /dBm	OUTPUT POWER @PLINEAR (PSAT – 3dB) (WATTS/dBm)	POWER REQUIREMENT	POWER CONSUMPTION PSAT/PLINEAR (Watts)	DIMENSIONS (in/cm)	WEIGHT (LBS/KG)
40W / 46	20 / +43	110 -220VAC (*1)	350	3 RU	32 / 14.5
50W / 47	25 / +44	110 -220VAC (*1)	400	3 RU	32 / 14.5
80W / 49	40 / +46	110 - 220VAC	750	3 RU	32 / 14.5
100W / 50	50 / +47	110 - 220VAC	780	3 RU	32 / 14.5
125W / 51	60 / +48	110 - 220VAC	780	3 RU	32 / 14.5
150W / 52	80 / +49	220VAC	1600	3 RU	52 / 23.5
200W / 53	100 / +50	220VAC	1650	3 RU	52 / 23.5
250W / 53.2	112 / +50.5	220VAC	1650	3 RU	52 / 23.5
300W / 55	150 / +52	220VAC	2400	5 RU	82 / 37
400W / 56	200 / +53	220VAC	2500	5 RU	82 / 37
500W / 57	225 / +53.5	220VAC	2500	5 RU	82 / 37

ORDERING INFORMATION To place an order, build your specific Ku-BAND SSPA by specifying the following in your ordering number:

Ordering Number: **AL__ - RM - G - KU - __ - __ - __ - OPTIONS**

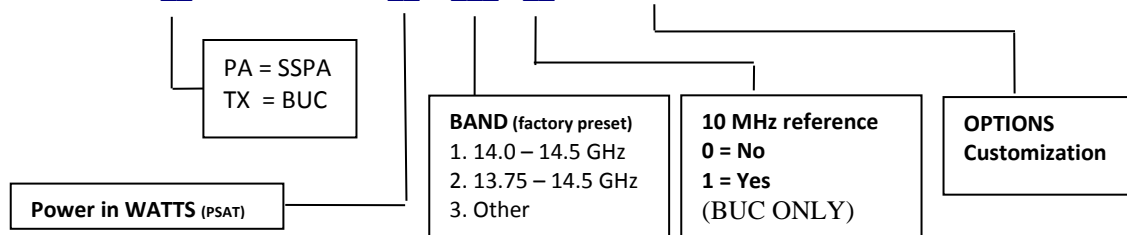

COST EFFECTIVE SOLUTIONS FOR THE FUTURE

SALES@ALGA.CA | WWW.ALGA.CA | 1-514-694-8666

